

# Front Seat Covers for '13-'18 Jeep Wrangler JK

## Install Instructions



### Parts

A.



B.



C.



Read through all of the instructions completely before beginning the install.

Parts Included:

- A. 2 Head Rest Covers (Driver and Passenger)
- B. 2 Seat Base Covers (Driver and Passenger)
- C. 2 Seat Back Covers (Driver and Passenger)

Tools Required:

T-40 Torx

Remove all parts from the box and unwrap completely.

Time:

Approx 2 hours.



1. Place the covers out in the sun. This will allow the material to warm up and get rid of most creases formed from being in the box. This also makes it easier to fit the covers over the seat.




2. Start by removing the headrest from the seat. Push in both release buttons and lift the headrest up and out.



3. Slip the top cover over the seat.

Tuck the material around and under the headrest slots, then take the material on the bottom of the cover and push it through the seat.

Lift both flaps on the back of the seat and continue to pull the material through.

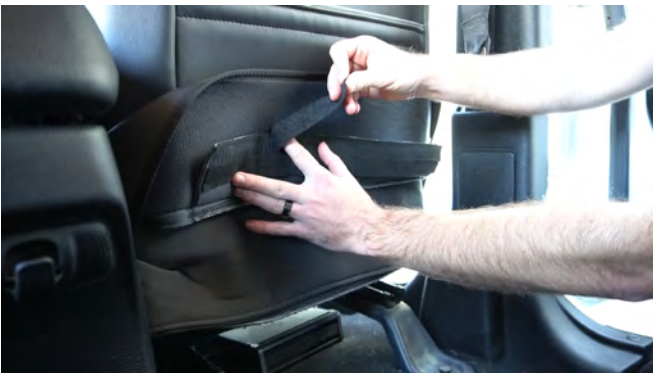

4. Remove the felt strip on the Velcro and tuck the stock seat cover's flap up.

Then take both ends of the seat cover and attach the Velcro strips.



5. Fit the recliner handle through the opening in the material on the side.

It is easier to start from the front of the handle and work your way back.



6. Take the airbag flap on the side and begin tucking it in to the seat, under the material.

NOTE: Make sure the soft material lies flat on the seat to ensure that the airbag will open properly in the case of an accident.



7. For the bottom cover, start by feeding the seat belt through the opening in the material, then wrap the edges of the cover around the stock seat.


Take the back flap and push it through the seat.



8. If you are working on the driver's side, you will need to remove the height adjustment handle first.

Do this by using a T-40 Torx and seatbelt.

Tuck the material over and under the mechanism, then once the cover is on, reinstall both the handle and seatbelt.

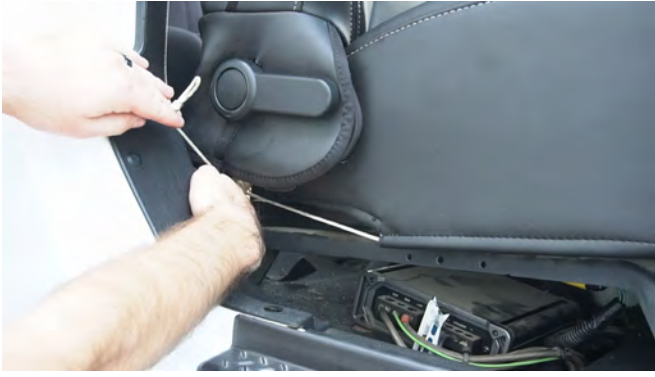

9. Take the string on the bottom of the seat feed them to the back.

Make sure that they go over the slider mechanism, not under, as they will prevent the seat from moving if they do so.



10. Feed the strings through the loops on the back flap, then take pliers and pull the strings as tightly as possible.

This will ensure the seat covers stay secure and in place.

Tie the ends of the string together.



11. Slide the front headrest covers over the headrest and attach the Velcro strips to hold the cover in place.

Once they are on, put the headrest back on the seat.



If you have any questions or experience issues, please contact your retail outlet first for help.

However, the staff at PRP Seats is always happy to help at 1-800-317-6253.

Thank you! Ride safe!